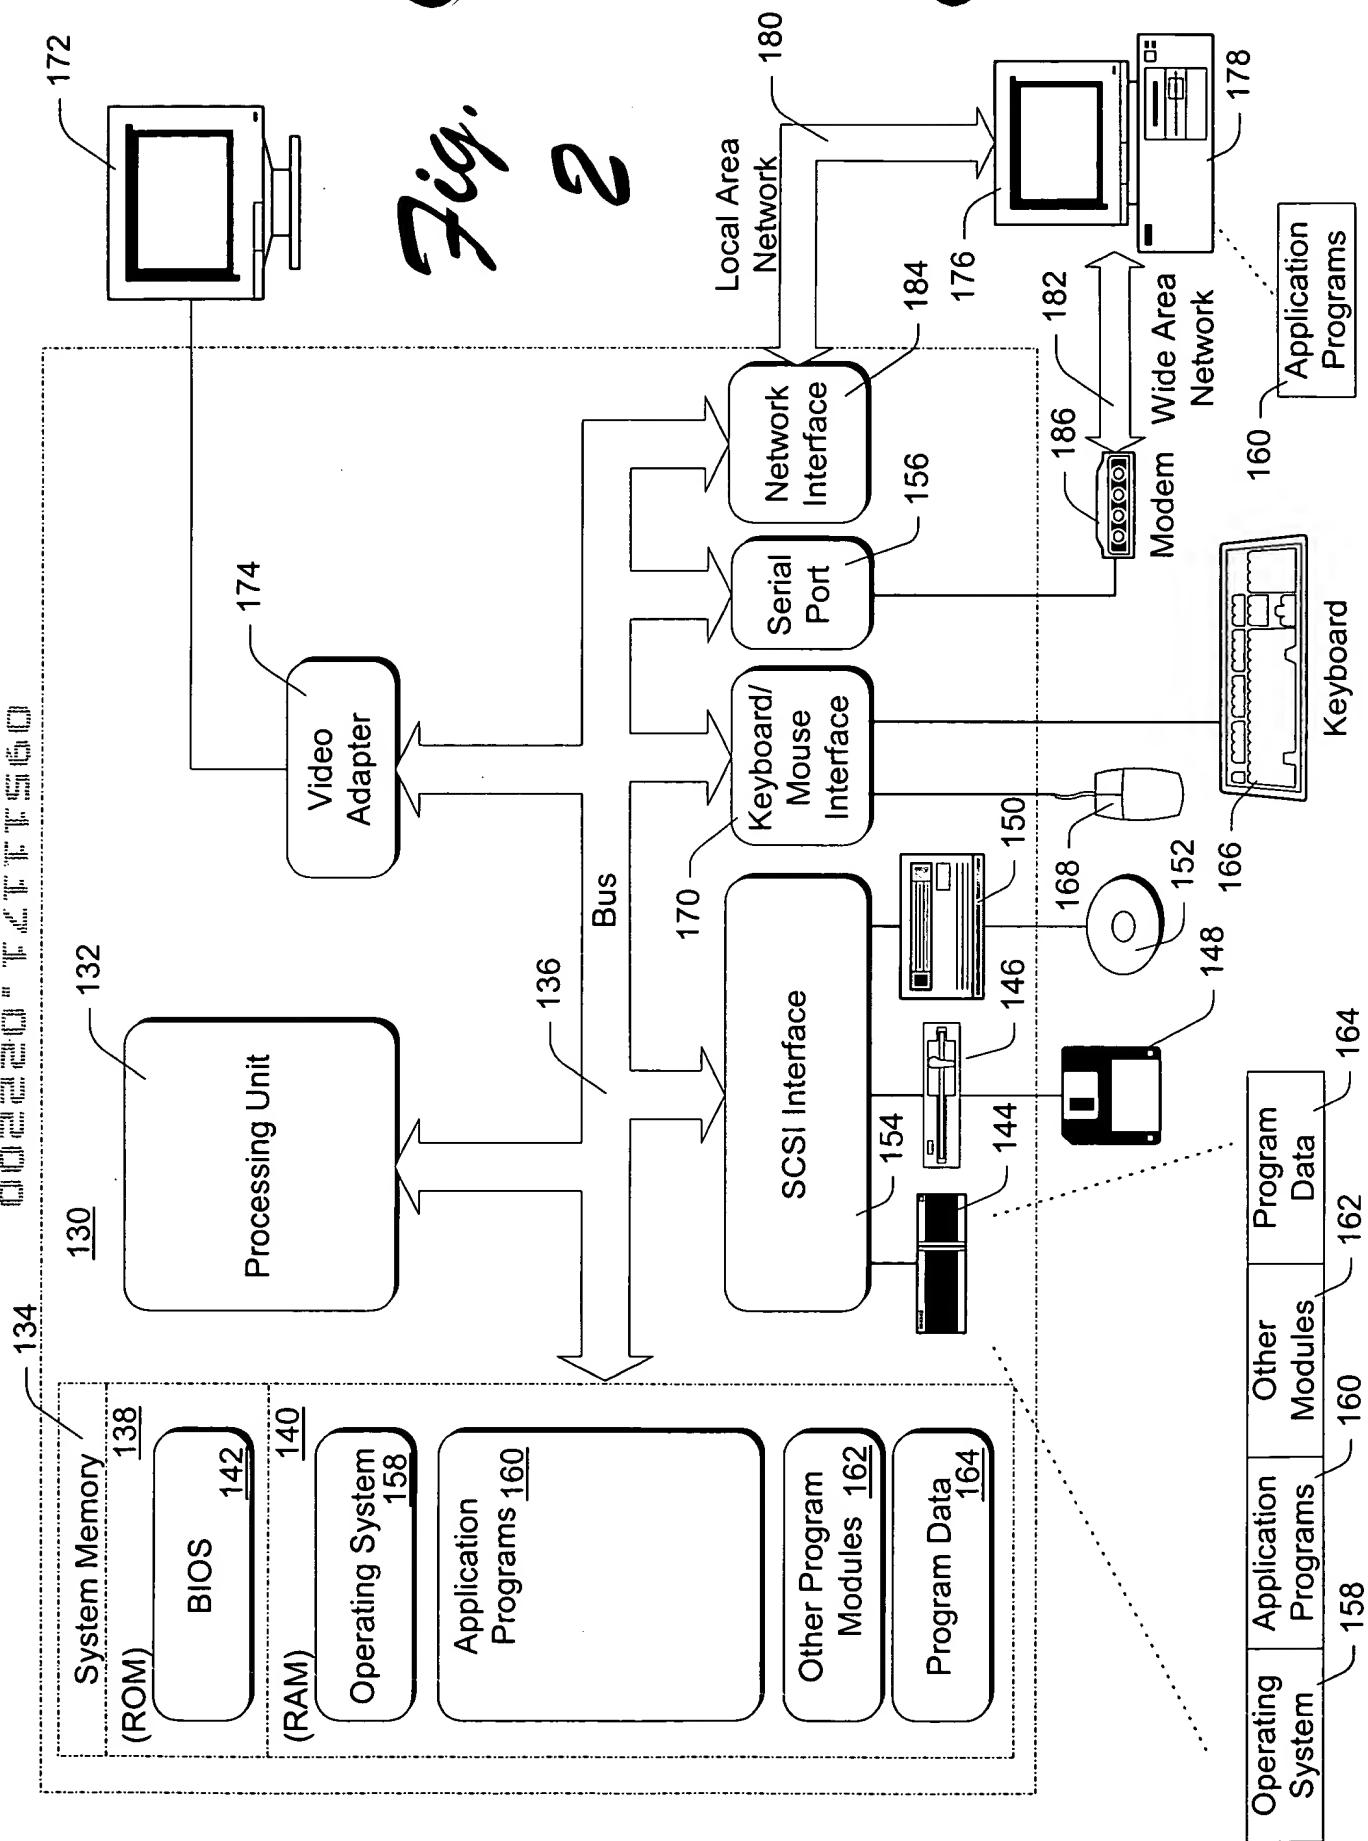
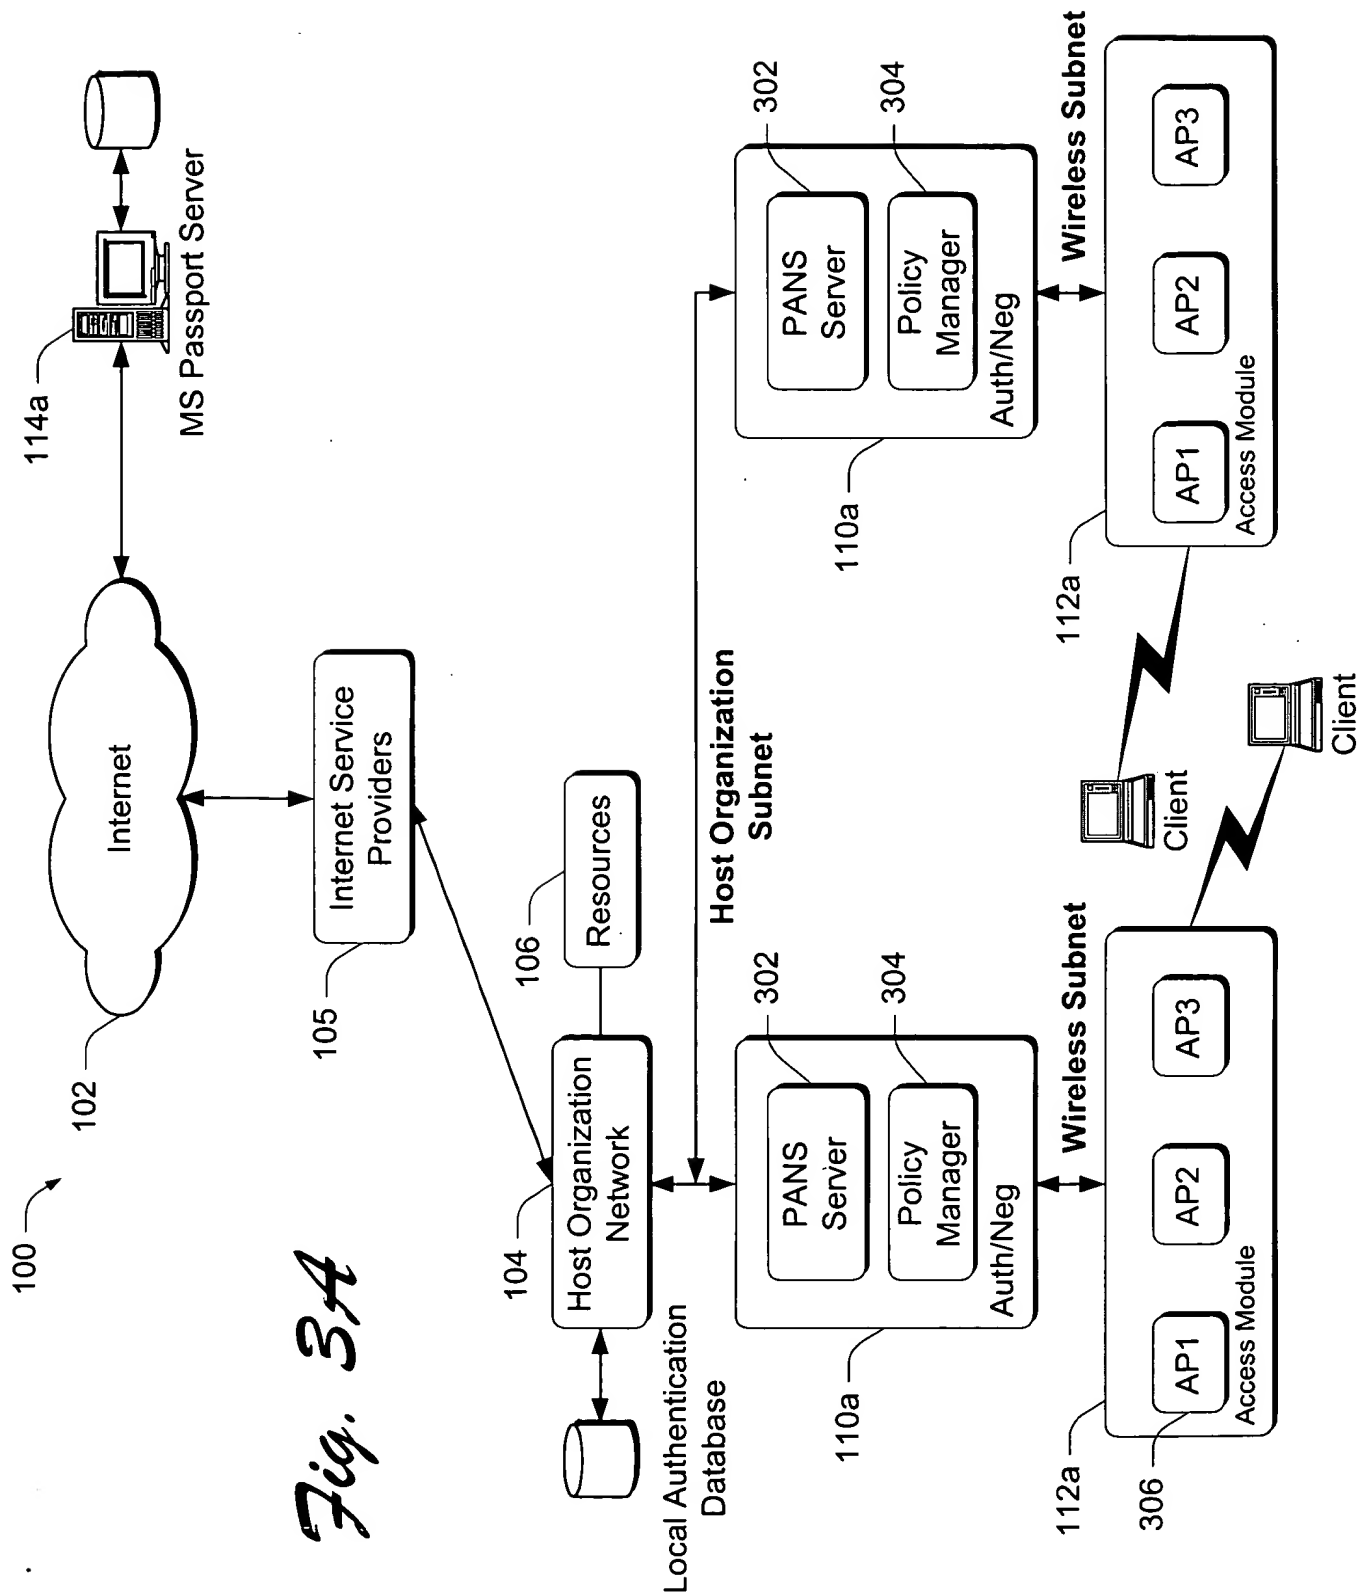


Fig. 1

FIG. 2





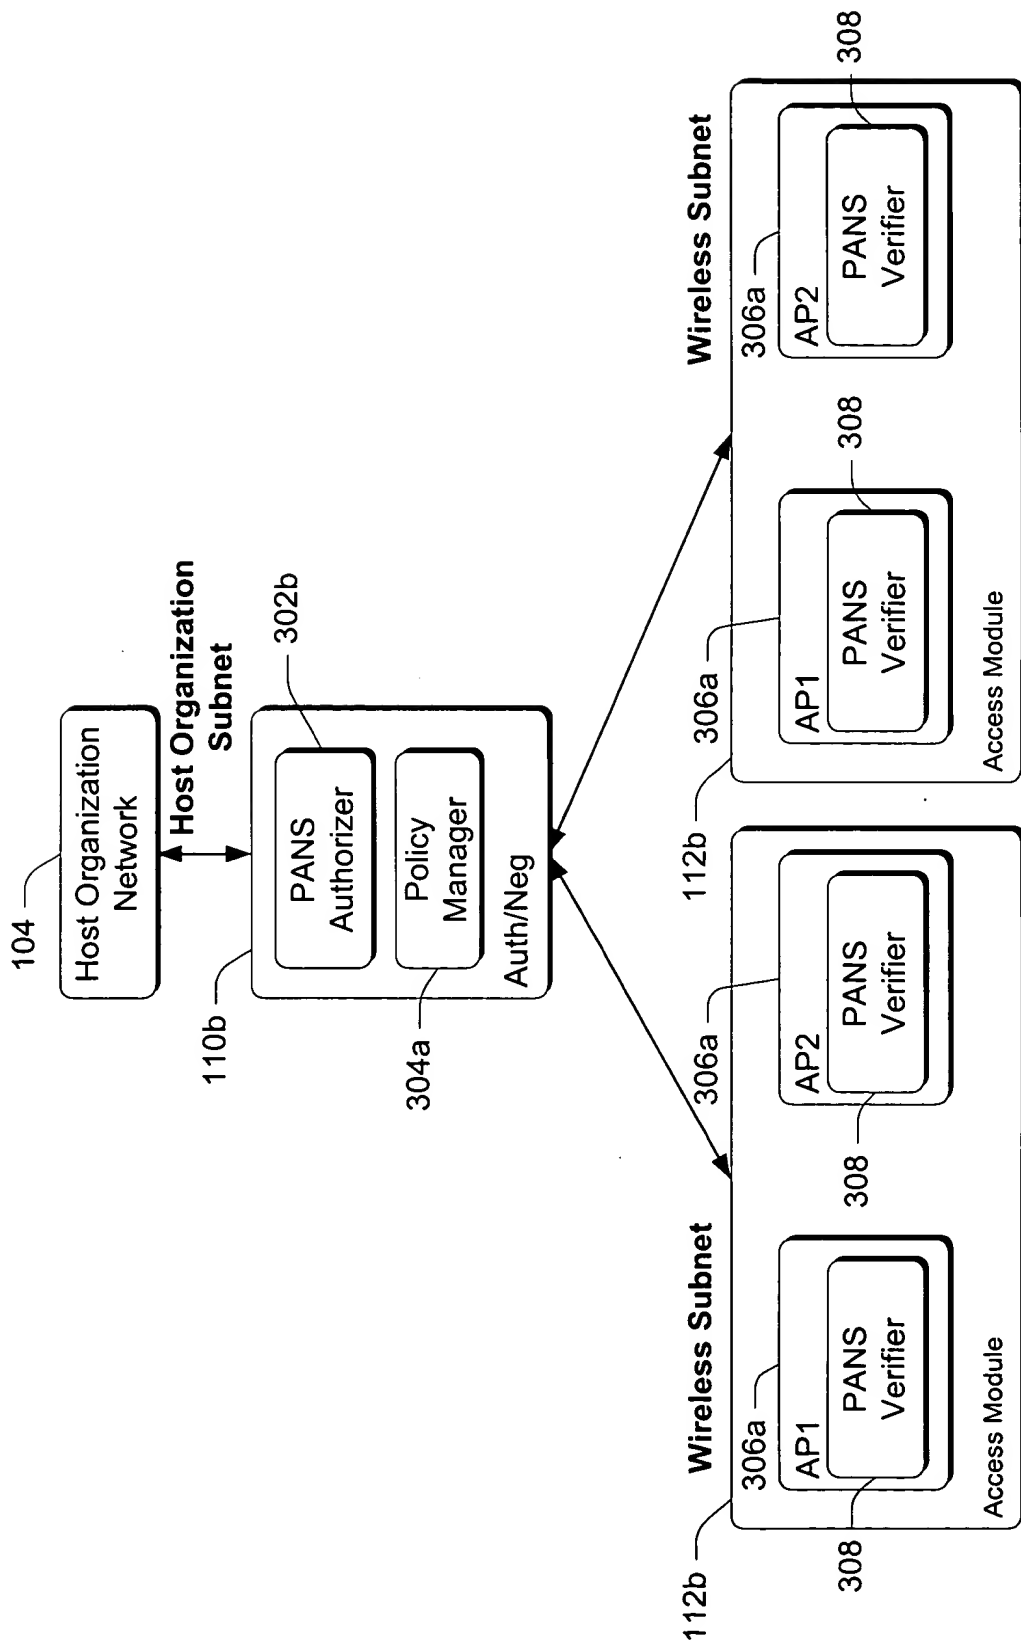


Fig. 38

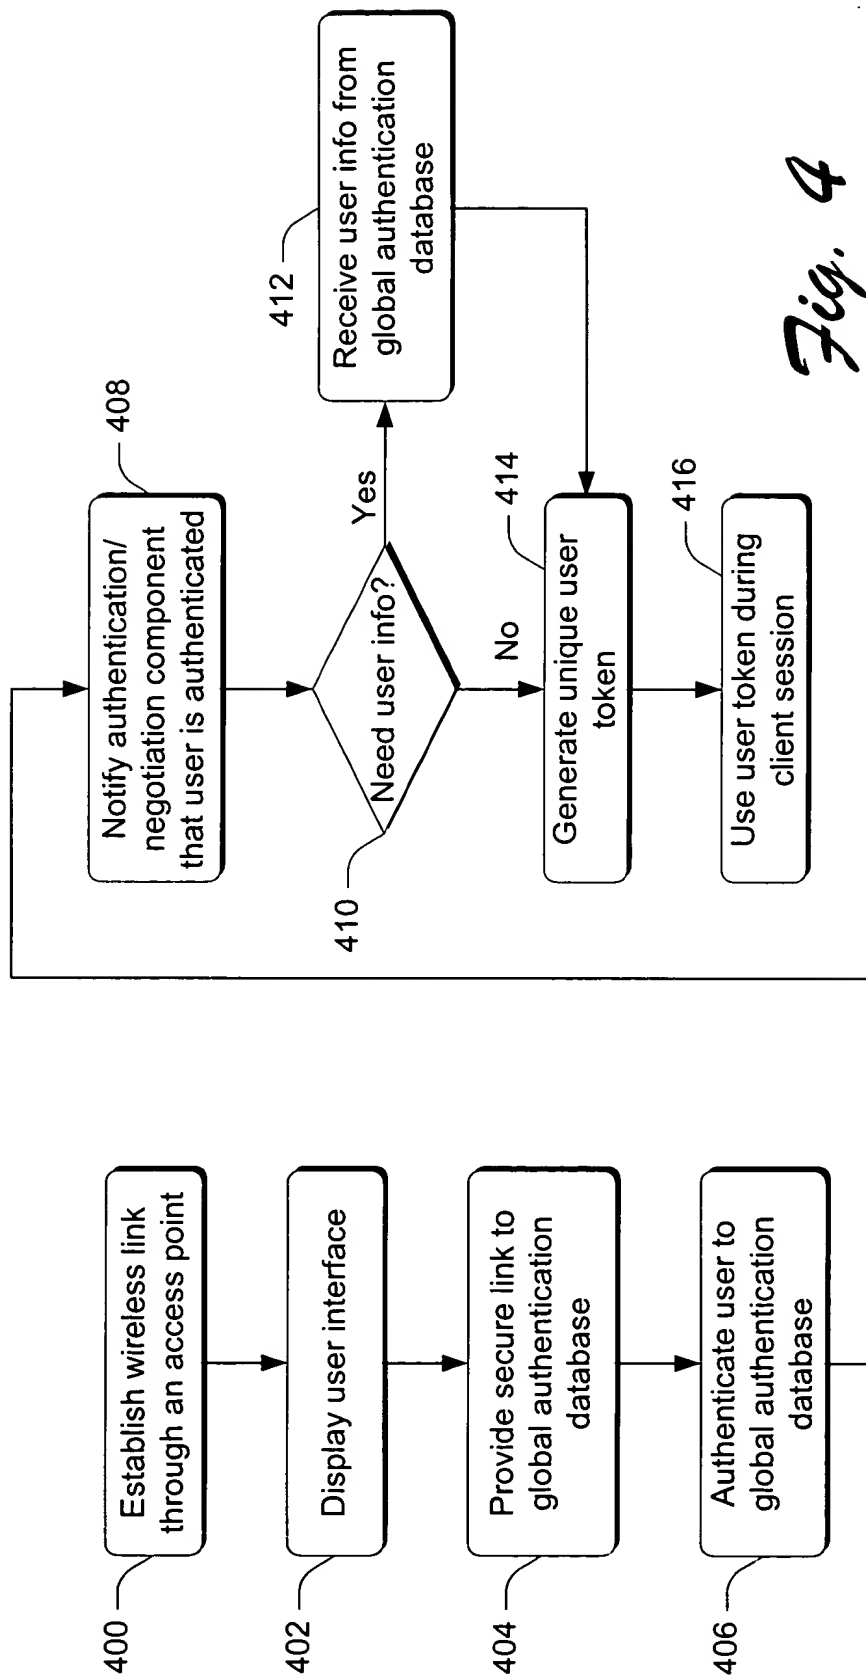
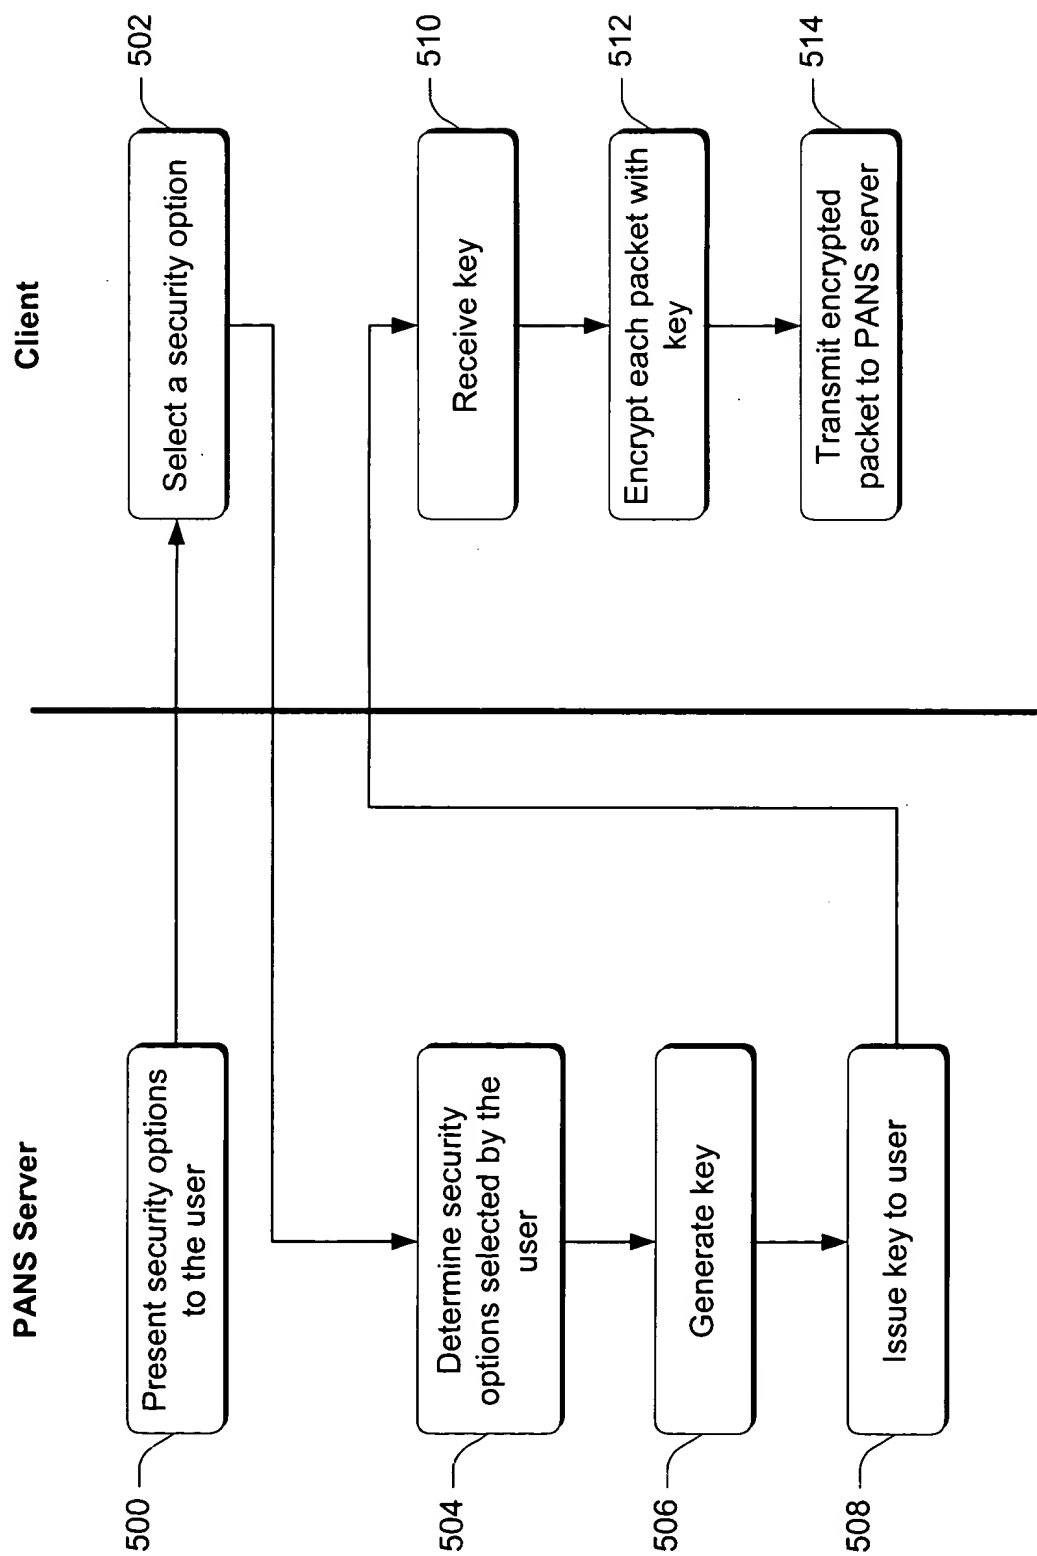


Fig. 4

*Fig. 5*

Please select key length:

- ☐ 40 bits
- ☐ 125 bits
- ☐ 256 bits
- ☐ other

Please select the number of encryption algorithms to select from:

- | | | | | |
|---|---|---|---|---|
| 2 | 3 | 4 | 5 | 6 |
| ○ | ○ | ○ | ○ | ○ |

Fig. 6

MS1-493US

002220" T4T50

302

PANS
server

"GO"



Client



Client



Client

Level I



Client




Client



Client

Level II

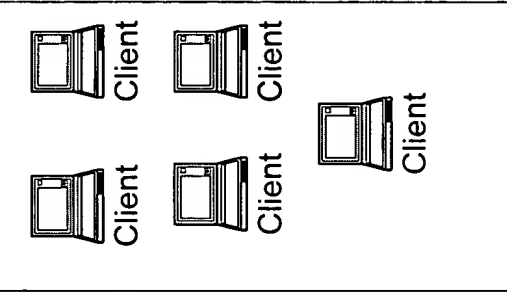

Level III

Fig. 7



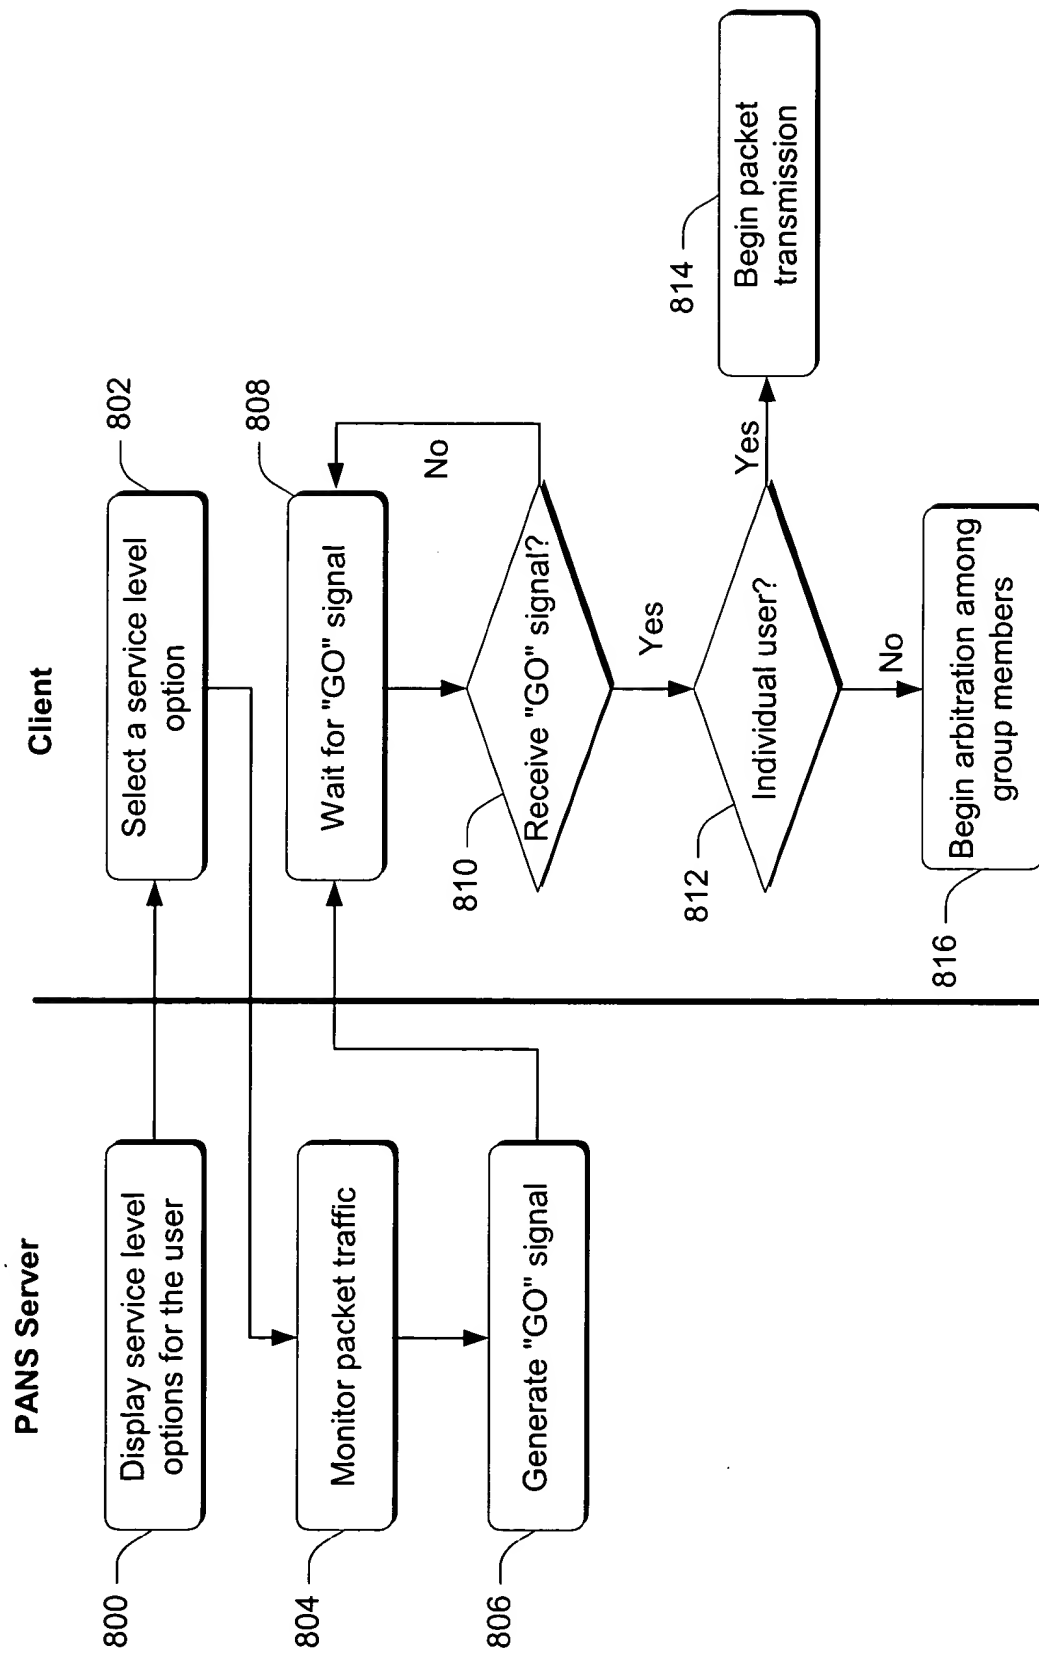


Fig. 8

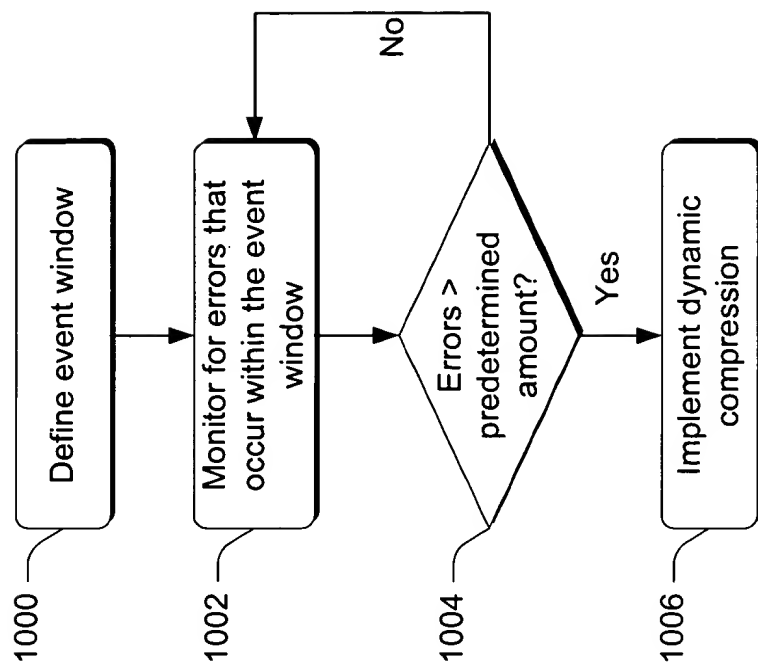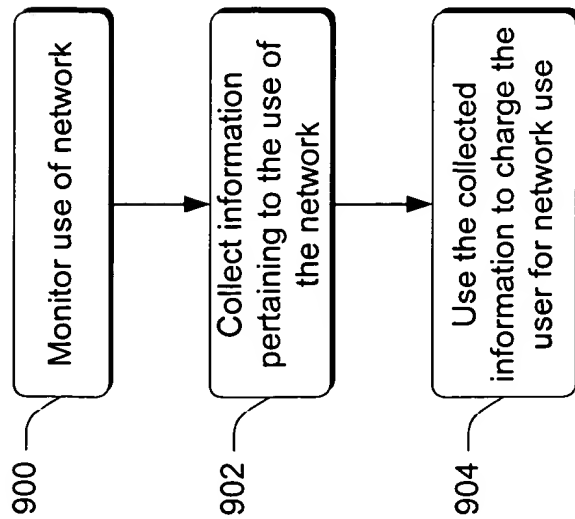

1100 →

Errors	Compression percent
0-1	100%
2-5	80%
6-10	50%
11-15	10%
+15	0%

Fig. 11

1200

1202

1204

1206

6 Mb/s

\$X/Kbit

0.1 Mb/s

3.5 Mb/s

Quality

Cost

Data Rate

Display>>

OK

Cancel

Fig. 12